

## SABERBLOC MODULE

Datasheet Code 5-5-01 E      MSDS Code 104-9-EURO

© 2009 Morgan Thermal Ceramics, a business within the Morgan Ceramics Division of The Morgan Crucible Company plc



### DESCRIPTION

Saberbloc refractory fiber modules are lightweight, insulating linings made in block form for direct attachment to industrial furnace and kiln shells.

Saberbloc Modules are made from high quality needled Blanket, pre-compressed to a specific density, and held in position with stainless steel reinforcement and mounting hardware made up of centre rod positioned within the folds and connected to a channel on the cold face of the module. These prefabricated modules are designed to meet the thermal insulation requirements of high temperature furnaces.

During installation, the modules are further compressed, the resilience of the fiber and recovery ensure tightly compressed inter-modular joints.

### TYPE

Refractory fiber blankets in modular form

### CLASSIFICATION TEMPERATURE

Saberbloc Module : 1260 °C & 1425 °C

Saberbloc III Module : 1260 °C & 1425 °C

### AVAILABILITY

Standard sizes :

300mm thick X 300 mm width X 300 mm length

### FEATURES

- Faster insulation
- Reduced shrinkage compared to layered lining
- Versatile and be easily cut on the site to suit awkward configurations
- Low heat storage
- Superior thermal stability and shock resistance
- Resilient to mechanical damage

### APPLICATIONS

- High temperature furnace
- Kiln and Heater linings
- Coil annealing furnaces
- Reheat furnace door linings
- Ammonia reformers and crude oil heater linings
- Shuttle and Tunnel Kilns

## SABERBLOC MODULE

### MAJOR PROPERTIES

Density kg/m <sup>3</sup>	> 160	
Chemical Composition (%)	1260°C	1425 °C
Al <sub>2</sub> O <sub>3</sub>	42 - 46	33 - 37
SiO <sub>2</sub>	52 - 58	48 - 52
ZrO <sub>2</sub>	-	13 - 17


### DIMENSIONS & AVAILABILITY

The modules can be made with other sizes and densities are available on request

The values given herein are typical values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Therefore, the data contained herein should not be used for specification purposes. Check with your Thermal Ceramics office to obtain current information


## SABERBLOC MODULE

### DESCRIPTION OF THE FASTENING SYSTEM

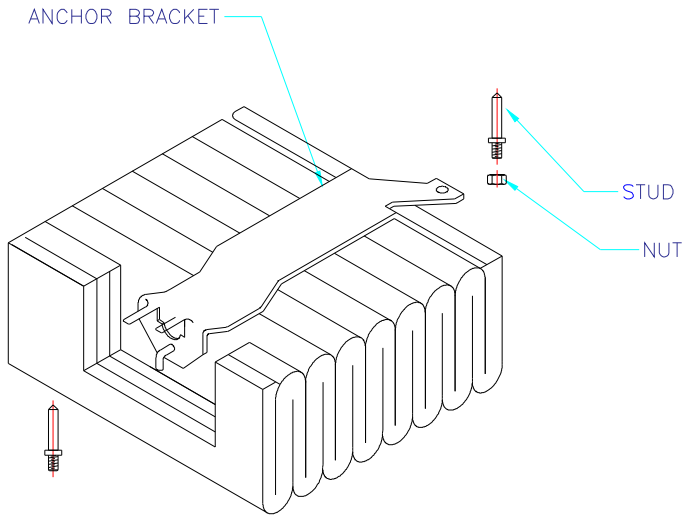

### SABER BLOC MODULE

EACH MODULE CONSISTS OF TWO STUDS & ONE M6 NUT

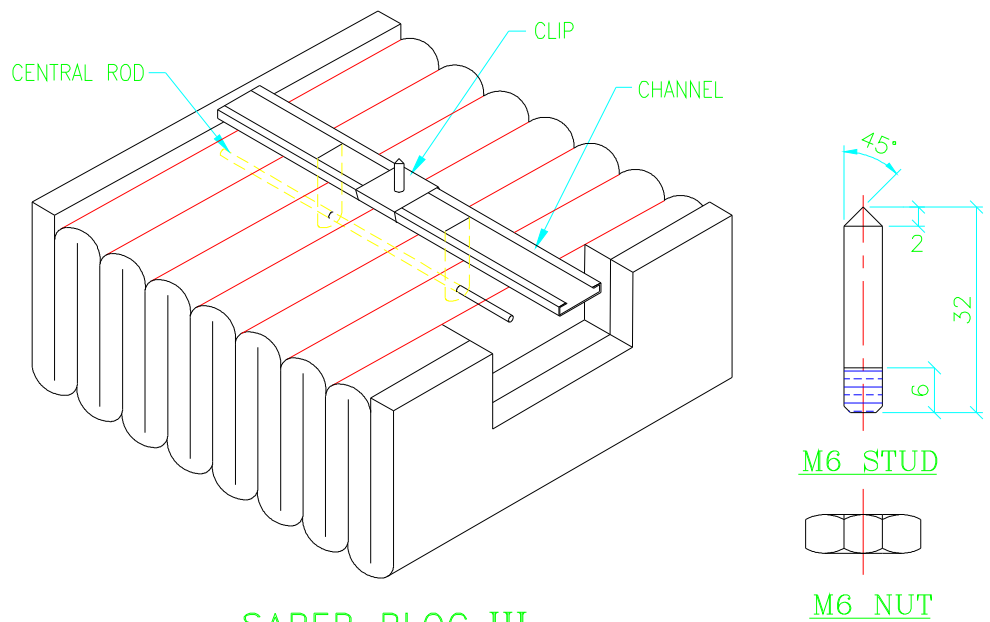

### SABER BLOC III

The values given herein are typical values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Therefore, the data contained herein should not be used for specification purposes. Check with your Thermal Ceramics office to obtain current information