



WDS[®] Nextra Board

Product Data Sheet

Product Description

WDS Nextra Board is a rigid and compact microporous insulation board designed for applications where the best thermal insulation performance (lowest thermal conductivity) up to 1000°C (1832°F) is the main selection criteria.

All WDS microporous insulation solutions offer exceedingly low thermal conductivity at high temperatures by limiting convection, conduction and radiation through advanced techniques. This results in an insulating solution that is several times better than typical high temperature lightweight insulation materials.

WDS microporous insulation solutions are the ideal choice for increased energy savings, space optimization and/or reduction of weight.

Features

Next generation and best-in-class, SiC opacified microporous board, for the lowest thermal conductivity it provides within its prescribed temperature range

Unaffected by thermal shock

Stable product mineral matrix, free from binders

Easy to cut and with proven installation techniques

Improved product mineral matrix core features minimal dust release

Homogeneous structure

Does not contain hazardous components such as Rutile (TiO₂)

Available as a raw board or in a variety of protective coatings or coverings

Available as a flexible slatted board or pre-shaped shell

Benefits

- > The use of the most thermally efficient WDS Board allows for the ultimate design flexibility whether you need to save energy or create space
- > Suitable for applications requiring rapid heat up or cool down
- > Dimensionally and structurally stable up to the maximum classification temperature
- > Quick and easy dimensional modifications
- > Very good handling and machining capabilities
- > Reliable and consistent performance throughout the board
- > Environmentally friendly and safe
- > Suitable for a variety of applications
- > Suitable for curved surfaces and pipes

Applications

Suitable for a range of industrial and domestic applications including:

- Metal production
- Petrochemical process units
- Energy storage
- Fuel Cells
- Glass production
- Ceramic kilns
- Cement kilns
- Power generation
- Incineration

WDS[®] Nextra Board

Product Data Sheet



Properties		WDS Nextra Board
Classification Temperature, °C (°F)		1000 (1832)
Density, kg/m ³ (pcf), DIN 66133		275 (17.2)
Linear Shrinkage, %, ASTM C356		
	1000°C (1832°F), 24 hour full soak	3.0
	1000°C (1832°F), 12 hour, single side soak	0.6
Compressive Strength, MPa (psi), ASTM C165		0.33 (47.9)
Chemical Analysis, %		
	Silica, SiO ₂	55-75
	Silicon Carbide, SiC	25-40
	Others	3-10
Thermal Conductivity, W/m·K (BTU·in/hr·ft ² ·°F), ASTM C177		
	200°C (392°F)	0.022 (0.153)
	400°C (752°F)	0.023 (0.160)
	600°C (1112°F)	0.027 (0.187)
	800°C (1472°F)	0.033 (0.229)

Shelf Life

- WDS Nextra Board has unlimited shelf life if it is stored properly
- WDS Nextra Board must be handled and stored in dry conditions
- WDS Nextra Board is resistant to diffusion by atmospheric humidity (water vapor) providing condensation is avoided

*Standard Dimensions and Availability

Dimensions, mm (in)	Thickness, mm (in)
1000 x 650 (39 x 24.41)	10, 12, 15, 17, 20, 25, 30, 35, 40, 45, 50
1320 x 1000 (47.24 x 39.27)	(0.4, 0.5, 0.6, 0.7, 0.8, 1, 1.18, 1.37, 1.57, 1.77, 2)

*Non-standard dimension feasibility reviewed upon request

Environmental and Health Safety

WDS Nextra Board does not contain any hazardous or decomposition substance according to the EU Directive 2006/1907/EEC and IARC. The fibers or filaments used as reinforcement of the mineral core are also exonerated from any classification as defined by the WHO (World Health Organization) and EU Directive 97/69/EC.

Resistance to Moisture and Water

WDS Nextra Board has a porous surface therefore it is sensitive to all liquids that can wet it; this includes substances such as water, oil and petroleum spirit, since they can destroy the pore structure which would in turn affect the insulation properties. Non condensed moisture, on the contrary, does not affect the product.

Sensitivity to liquids of WDS Nextra Board can be eliminated by using various surface treatment options outlined at the end of this document.

WDS[®] Nextra Board

Product Data Sheet

Encapsulation and Surface Protection

WDS Nextra Board is available with various encapsulation and surface protection options in order to add additional features to the board.

Encapsulation Selection Criteria	Improved handling	Mechanical protection	System flexibility	Water resistance	Heat reflection	Dust prevention
*Non-woven glass fiber protection (GFE2)	X	X				X
*Aluminium foil encapsulation (ALE2)	X	X		X	X	X
Shrink wrapped in PE foil (FO)	X	X	X	X		X
Sprayable bi-component coating (G-Plus)	X	X				X

*Also offered with edge protection only.


Alternative Formats

WDS Nextra Board is also available as:

WDS NextraShell



WDS Nextra Slatted

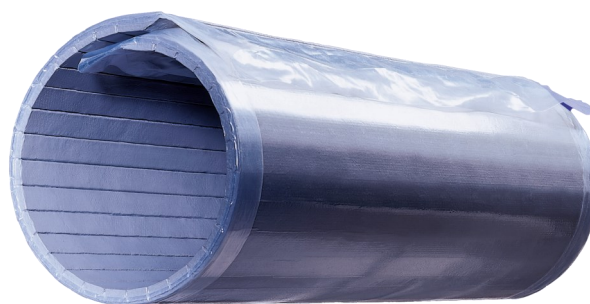

The product(s) represented are intended for industrial refractory applications. The values and application information in this datasheet are given for guidance only. The values and the information given are subject to normal manufacturing variation and may be subject to change without notice. Morgan Advanced Materials – Thermal Ceramics makes no guarantees and gives no warranties about the suitability of a product, and you should seek advice to confirm the product's suitability for use with Morgan Advanced Materials.